Upavon Infiltration Reduction Plan Summary

This provides an update on the last year's groundwater situation, what mitigation actions, if any, were taken and a summary of our action plan to prevent flooding due to groundwater infiltration of our sewer network.

April 2023 - March 2024

Regional Summary

The Wessex region experienced incredibly wet weather across 2023-24, with higher-than-average rainfall in nine months during the period. February 2024 was both the warmest on record and the wettest in 30 years, with the 12-month sequence to the end of February being the wettest since our records began in 1911.

Groundwater levels rose rapidly during the autumn, and whilst drier weather in January 2024 provided a brief reprieve, levels remained high for the majority of the winter.

Warmest February on record for England and Wales - Met Office

Local Summary

Groundwater reached very high levels in the Upavon catchment and two reported incidents were attributed to inadequate hydraulic capacity (IHC) in January 2024.

Action Plan

Annual Activity

Review asset and operational data and update annual reports.

Continue monitoring system performance using telemetry, rainfall records and local groundwater levels to inform the operational response during high-groundwater periods, and to monitor changing infiltration levels in the catchment.

Use machine learning to predict flows in sewers and proactively identify blockages and other issues.

Undertake pro-active cleaning (jetting) of sewers to maximise capacity.

Proactive inspections and maintenance of sewerage assets.

Completed

Installed permanent flow meters at key pumping stations to continuously record pump performance.

Implemented a scheme to address capacity issues in the sewer network.

Updated the catchment hydraulic model.

Inspected public sewer network to identify points of infiltration.

Undertaken pumping station or flow surveys to analyse flows in sewers.



Completed (cont.)

Reviewed incidents of sewer flooding.

Sealed sewers and manholes to prevent groundwater infiltration.

Short Term

Undertake pro-active inspection of public sewers and manholes using CCTV to identify points of infiltration.

Medium Term

Analyse flows in sewers using pumping station surveys, flow surveys and/or hydraulic modelling.

Install in-sewer monitors at key locations to better understand flows in the network.

Undertake review of incidents of sewer flooding suspected to be affected by groundwater infiltration.

Infiltration sealing of sewers and manholes, where deemed cost-effective, targeting work according to study findings.

Upgrade pumping stations where appropriate, to improve the reliability and performance of the site.

Long Term

Identify road gullies and other impermeable areas that are connected into the foul sewers.

Inspect private gullies, drains, and manholes where applicable.

Consider sustainable solutions to rainwater management, for example above-ground attenuation and property-level interventions.

When Necessary


Implement emergency tankering procedure for preventing restricted toilet use and sewer flooding during high groundwater periods, in order to protect public health.

Implement Operational Mitigation Action Plan (OMAP) for discharging excess flows to the environment as a last resort, when tankering would not prevent restricted toilet use or sewer flooding, and public health is at risk.



Current Performance

Following a flood alleviation scheme at North Newton in March 2015 and sealing upstream of Andover Road in May 2014, there was a significant reduction in flooding incidents attributed to inadequate hydraulic capacity. However, following extreme groundwater levels in 2019/2020 & 2022/23 further flooding attributed to inadequate hydraulic capacity was reported. Extended pump run times at both Andover Road and North Newnton during periods of high river levels indicates there is still groundwater infiltration affecting the catchment.

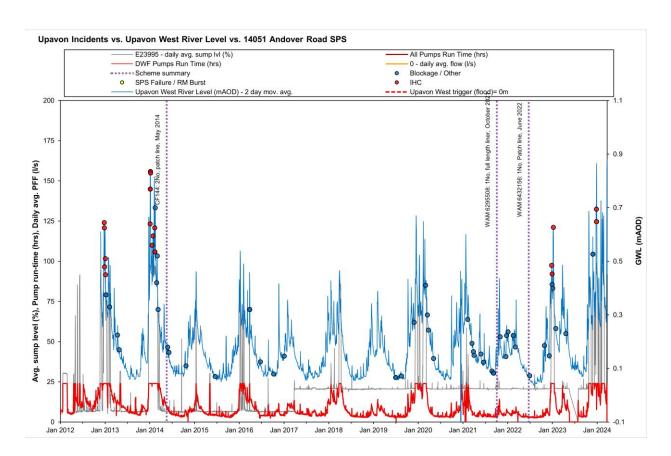



Inspection and sealing since 2011

	2011-20	2020-21	2021-22	2022-23	2023-24
Length of sewer	3,053	ı	3,518	_	746
inspected (m)	3,000		3,5 . 5		,
Length of sewer	2		25	11	_
sealed (m)		_	23	11	_